

DP 17/15 AR




**PCT**

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B62D 55/275</b>		A1	(11) International Publication Number: <b>WO 96/29234</b>
			(43) International Publication Date: 26 September 1996 (26.09.96)
(21) International Application Number: PCT/GB96/00625		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>	
(22) International Filing Date: 15 March 1996 (15.03.96)			
(30) Priority Data: 9505515.8 18 March 1995 (18.03.95) GB			
(71) Applicant (for all designated States except US): WILLIAM COOK CAST PRODUCTS PLC [GB/GB]; Parkway Avenue, Sheffield, South Yorkshire S9 4UL (GB).			
(72) Inventor; and (75) Inventor/Applicant (for US only): BAKER, Peter, Edward [GB/GB]; 15 Balmer Hill, Gainford, County Durham D12 3EJ (GB).			
(74) Agent: WALSH, David, Patrick; Dibb Lupton Broomhead, 117 The Headrow, Leeds LS1 5JS (GB).			

(54) Title: ROAD PADS FOR TRACKED VEHICLES

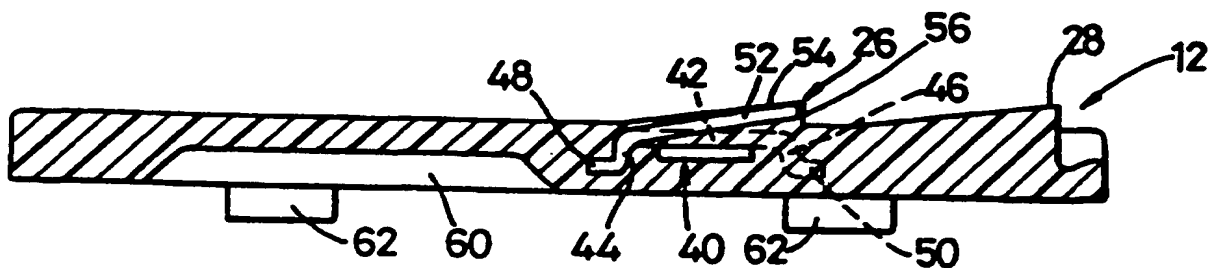

(57) Abstract

A road pad (10) for a tracked vehicle such as a tank is disclosed. The pad consists of a plastics backing plate (12) and a rubber cushion (14) bonded to the backing plate (12). The plate (12) includes latching projections (26, 28) which engage with latching surfaces (30, 32) in a track link to retain the pad (10) in place. One or more pressed steel reinforcing elements (40) are encapsulated within the backing plate (12) or between the backing plate (12) and the rubber cushion (14) and extend into the latching projections (26, 28) to reinforce them. The reinforcing elements (40) are cheap to manufacture and, being encapsulated, are not prone to corrosion.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

ROAD PADS FOR TRACKED VEHICLES

This invention relates to road pads for tracked vehicles such as tanks. Road pads are incorporated into the tracks  
5 to cushion the impact between the tracks and the surface upon which the vehicle is driven. Between adjacent plates of the track, track links are located, coupled to the plates via bushes, to allow articulation of the track. The road pads are usually fixed to the track links.

10

An example of an arrangement as described above can be found in UK patents nos. 1077444 and 1405742. In each case, the pad consists of a metallic backing plate and a rubber cushion bonded to one side of the backing plate.  
15 The edges of the backing plate project beyond the cushion and acts as guides which enable the pad to be slid into cooperating grooves in the track link. Part of the backing plate is cut out and raised to form a latching projection which cooperates with a latch on the track link to retain  
20 the pad in place.

These road pads have been found to suffer from a number of disadvantages. Firstly, the size of the backing plate and the cost of the material from which it is made contribute  
25 significantly to the cost of producing the pad. Many pads are used on each vehicle and the cost of kitting out the vehicle is increased accordingly. Secondly, the backing plate is prone to corrosion. Although the life of the backing plate exceeds that of the rubber cushion, the pad  
30 can be reconditioned by vulcanising a replacement cushion to the plate. Corrosion of the plate can reduce considerably the number of times the pad can be reconditioned.

35 It has recently been proposed to manufacture road pads almost entirely from polymeric material. The backing plates are formed from hard plastics material, either plain or fibre reinforced, to which the rubber cushion is bonded. The strength of the backing plate is sufficient to form the  
40 guide projections on either side of the pad to enable it to

slide in and out of the track link. However, to date, no plastics backing plate material has been able to deal with the stresses which must be withstood by the latching projection. Such plastics-backed pads are therefore  
5 provided with metallic reinforcements moulded into the backing plate and projecting from it to form the latching projection. Such reinforcements are machined and are therefore expensive to manufacture. They are also subject to corrosion.

10

It is an object of the present invention to address these problems. Accordingly, the present invention provides a road pad adapted for sliding engagement within a track link, the pad comprising a body of polymeric material  
15 having a latching projection adapted to cooperate with an abutment of the link to prevent withdrawal of the pad and in which the latching projection includes a reinforcing element encapsulated within the polymeric material. Because the reinforcing element is encapsulated within the  
20 polymeric material, it is not exposed to corrosive elements. As will be explained, the bulk of the latching projection can be formed from the polymeric material, enabling the reinforcing element to be manufactured inexpensively and using cost-effective manufacturing  
25 processes.

To give the pad structural rigidity, the body preferably comprises a backing plate and a cushion, the reinforcing element being encapsulated within the backing plate or  
30 between the backing plate and the cushion. The backing plate is preferably formed from plastics material and the cushion from a rubber material.

To impart a degree of flexibility to the latching  
35 projection, the reinforcing element may be resilient. For example, it may be formed from steel plate.

Preferably, the reinforcing element comprises a flat and a resilient tongue projecting from it into the latching

projection. The flat serves to anchor the reinforcing element in the body or backing plate and the tongue reinforces the latching projection. The tongue need only extend into that part of the latching projection which acts  
5 as the abutment surface to retain the pad in place in the track link.

The tongue may be an angled cut-out from the flat or it may be an angled extension of the flat.

10

For increased security, the body may have two latching projections. Each latching projection may be reinforced by a reinforcing element or alternatively the latching projections may be reinforced by a common reinforcing  
15 element. Such a common reinforcing element may comprise a flat and two tongues projecting from it into the latching projections. The reinforcing element may form a channel section with the tongues as the uprights of the channel.

20 The present invention will now be described with reference to the accompanying drawings in which:

figs. 1A and 1B illustrate a road pad made from a plastics backing plate and a rubber cushion;

25 fig. 2A is a lateral section through a track link for use with such a plastics-backed plate;

fig. 2B shows in longitudinal section a pad installed in the link of fig. 2A; and

30 figs. 3A, 3B to 16A, 16B show in plan and in section a variety of reinforced plastics backing plates for use in a pad according to the present invention.

As can be seen from figs. 1A and 1B, a typical plastics-backed pad 10 consists of a rubber cushion 14 vulcanised onto a plastics backing plate 12. At either side of the  
35 pad, the edges of the backing plate 12 extend beyond those of the cushion 14 to form guides 16, 18. These guides are tapered at their leading edges and cooperate with grooves 20, 22 in the track link 24 illustrated in fig. 2. The pad 10 is located in the link 24 and pushed into place such

that the guides 16, 18 slide within the grooves 20, 22. When the pad is pushed fully home, latching projections 26, 28 cooperate latching surfaces 30, 32 in the track link to retain the pad in place. The pad can be removed by releasing the latching projections 26, 28 from the latching surfaces 30, 32 using a specially-designed tool.

Fig. 3A shows in plan and fig. 3B in section a reinforced, moulded plastics backing plate 12 for use in a pad according to the present invention. The plate 12 is similar to the plate 12 illustrated in figs. 1A and 1B, but one of the latching projections 26 is strengthened by a reinforcing element 40. The reinforcing element 40 is formed from pressed steel plate and consists of a flat 42, both ends of which are turned down to form legs 44, 46 and include a return bend which forms feet 48, 50.

A substantially rectangular section is stamped out of the steel sheet on three sides to form a cut-out tongue 52 which is bent out of the plane of the flat 42 along its fourth side and projects into the latching projection 26. The tongue 52 lies close to the inclined outer surface 54 of the latching projection 26 and extends almost as far as its abutment surface 56, i.e. the surface which engages a latching surface 30 of the track link 24. The pad includes a second latching projection 28 which is not reinforced.

The surface of the backing plate 12 opposite the latching projections includes a depression 60 and keys 62 which help the vulcanised rubber cushion to bond to it.

The backing plate 12 is injection moulded with the reinforcing element 40 in situ. The correct positioning of the insert 40 to ensure in this case that it does not contact the surfaces of the mould is important. The insert 40 is positioned in the mould by means of stepped retaining pins together with magnets which ensure that the insert 40 is not dislodged from the pins during the injection moulding process. Subsequently a rubber cushion 14 (not

shown) is vulcanised to the recessed and keyed surface of the backing plate 12.

Fig. 4A shows in plan and fig. 4B in section a reinforced, moulded plastics backing plate 12 in which both latching projections 26, 28 are reinforced by a common reinforcing element 40. The reinforcing element is again formed from pressed steel and is similar to the reinforcing element 40 of figs. 3A and 3B, but includes two substantially rectangular cut-out tongues 52, 53, each of which reinforces a respective latching projection 26, 28.

Figs. 5A and 5B show a plastics backing plate 12 including a single reinforcing element 40 similar to that illustrated in figs. 3A and 3B, but in which the flat 42 is not turned down at either edge. In all essential respects, the reinforcing element is identical to that shown in figs. 4A and 4B, save insofar as it only reinforces one latching projection 26.

Figs. 6A and 6B, 7A and 7B and 8A and 8B show three different designs of plastics backing plate 12 in which just one latching projection 26; 28 is reinforced. Again the reinforcing elements 40 are formed from pressed or rolled steel, but the tongue 52 is merely an extension of one end of the flat 42 and extends at ninety degrees to it. The tongue extends adjacent the abutment surface 56; 57 of the latching projection 26; 28 to provide the requisite reinforcement.

It is clear from figs. 6B, 7B and 8B that the reinforcing element 40 is coterminous with the surface of the backing plate 12 to which the rubber cushion is to be bonded. There is no need when manufacturing this plate 12 to prevent the reinforcing element 40 from contacting the surface of the mould; indeed that possibility can be exploited to advantage by locating the reinforcing element 40 on the requisite surface and retaining it there by means of magnets during the injection moulding process. When the

rubber cushion is vulcanised in place, the encapsulation of the reinforcing element within the polymeric material is complete.

- 5 Figs. 9A and 9B illustrate a backing plate 12 including two reinforcing elements 40, 41 which are essentially identical to those shown in figs. 6A and 6B. Each reinforcing element reinforces a respective latching projection.
- 10 Figs. 10A and 10B illustrate a backing plate 12 in which a common reinforcing element strengthens both latching projections. The reinforcing element 40 is again formed from rolled steel plate, but two tongues 52, 53 project upwards from the flat 42 to form a reinforcing element 40
- 15 in the form of a channel section. Both latching projections 26, 28 are reinforced by a respective tongue 52, 53.
- Figs. 11A and 11B, 12A and 12B and 13A and 13B show three
- 20 different designs of plastics backing plate 12 in which one or two latching projections 26, 28 are reinforced by dowels 55 which are welded to and project from the flat 42 of a reinforcing element 40 at right angles. The dowels are located adjacent the latching surfaces 56, 57 of the
- 25 latching projections 26, 28 in question.
- Figs. 14A and 14B, 15A and 15B and 16A and 16B show three
- 30 different designs of plastics backing plate 12 in which one or two latching projections 26, 28 are reinforced by a continuous reinforcing element 40 which closely follows the contours of the latching projections 26, 28. In figs. 14A, 14B, 15A and 15B, the reinforcing element 40 consists of a flat 42, an upstand 60 and an angled continuation 62 lying below the tapered surface of the latching projection. In
- 35 figs. 16A and 16B, a further upstand 64 and continuation 66 are provided.



Claims

1. A road pad adapted for sliding engagement within a track link, the pad comprising a body of polymeric material having a latching projection adapted to cooperate with an abutment of the link to prevent withdrawal of the pad and in which the latching projection includes a reinforcing element encapsulated within the polymeric material.
2. A pad according to claim 1 in which the body comprises a backing plate and a cushion, the reinforcing element being encapsulated within the backing plate or between the backing plate and the cushion.
3. A pad according to claim 2 in which the backing plate is formed from plastics material.
4. A pad according to claim 2 or claim 3 in which the cushion is formed from a rubber material
5. A pad according to any preceding claim in which the reinforcing element is resilient
6. A pad according to claim 5 in which the reinforcing element is formed from steel plate
7. A pad according to any preceding claim in which the reinforcing element comprises a flat and a limb projecting from it into the latching projection.
8. A pad according to claim 7 in which the limb is a resilient tongue.
9. A pad according to claim 8 in which the tongue is an angled cut-out from the flat
10. A pad according to claim 8 in which the tongue is an angled extension of the flat.

11. A pad according to claim 7 in which the limb is a dowel projecting from the flat.
12. A pad according to claim 7 in which the limb is an upstand projection from the flat and the reinforcing element further comprises a continuation of the upstand which lies adjacent the surface of the latching projection.
13. A pad according to any preceding claim in which the body has two such latching projections
14. A pad according to claim 13 in which each latching projection is reinforced by a reinforcing element
15. A pad according to claim 13 in which the latching projections are reinforced by a common reinforcing element
16. A pad according to claim 15 in which the reinforcing element comprises a flat and two limbs projecting from it into the latching projections.
17. A pad according to claim 16 in which the reinforcing element forms a channel section with the limbs as the uprights of the channel.
18. A pad substantially as described herein with reference to any one of figures 2A to 16B of the accompanying drawings.

1/17

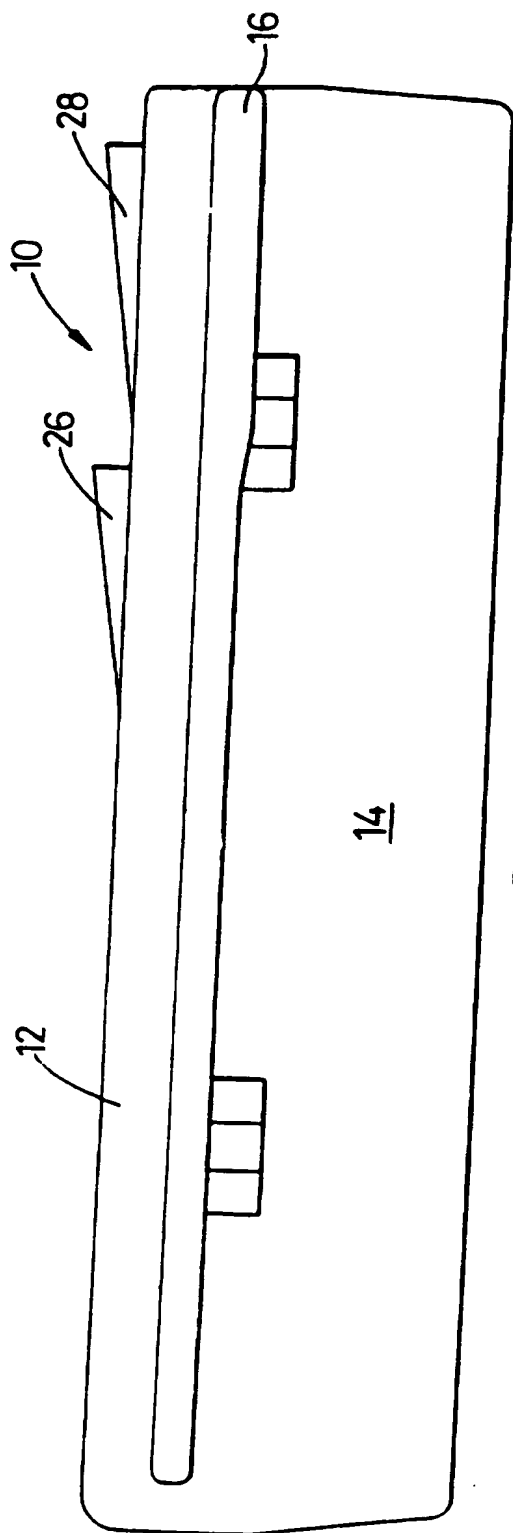


Fig. 1A

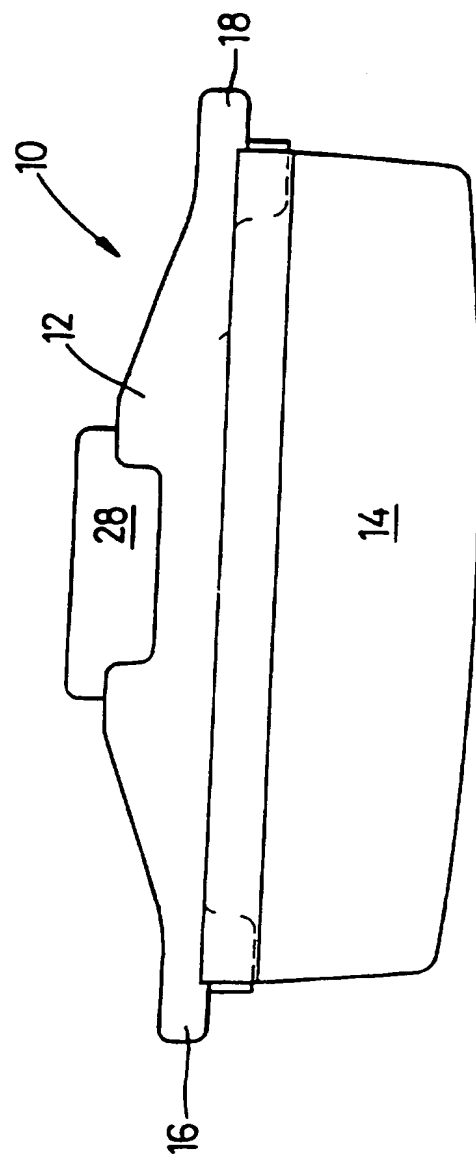


Fig. 1B

2/17


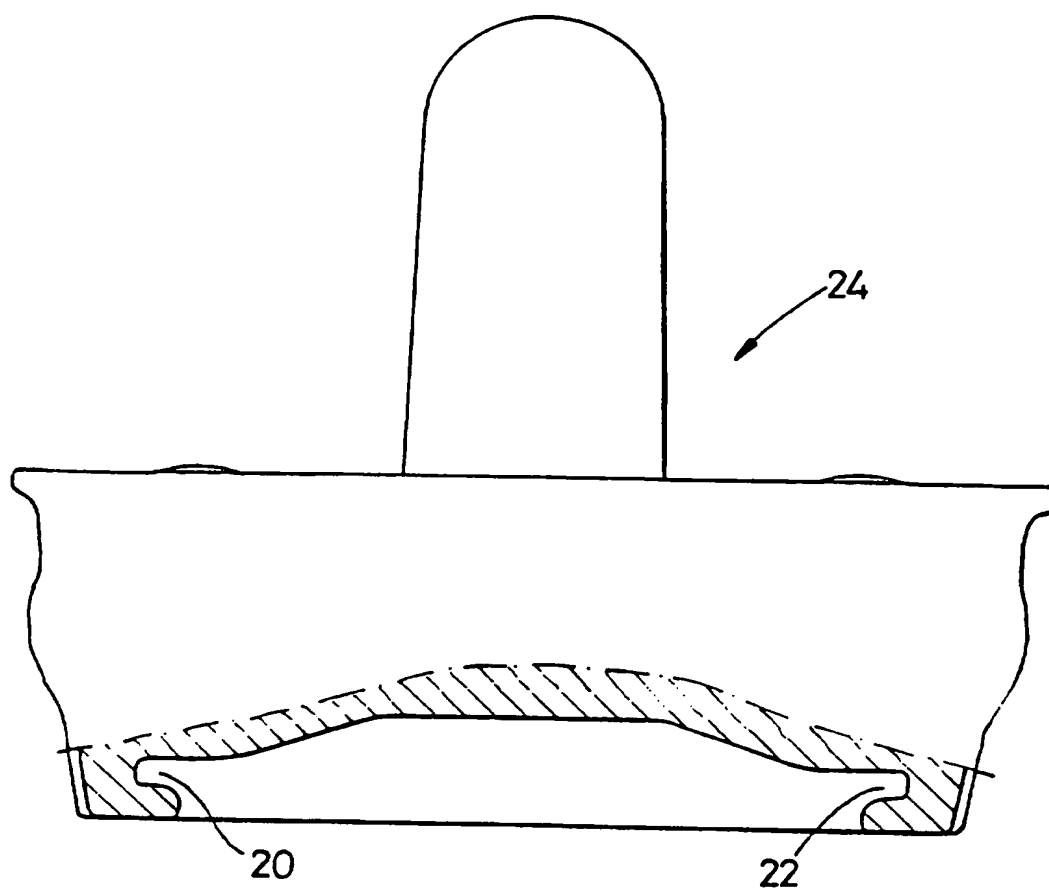


Fig. 2A

3/17

Fig. 2B

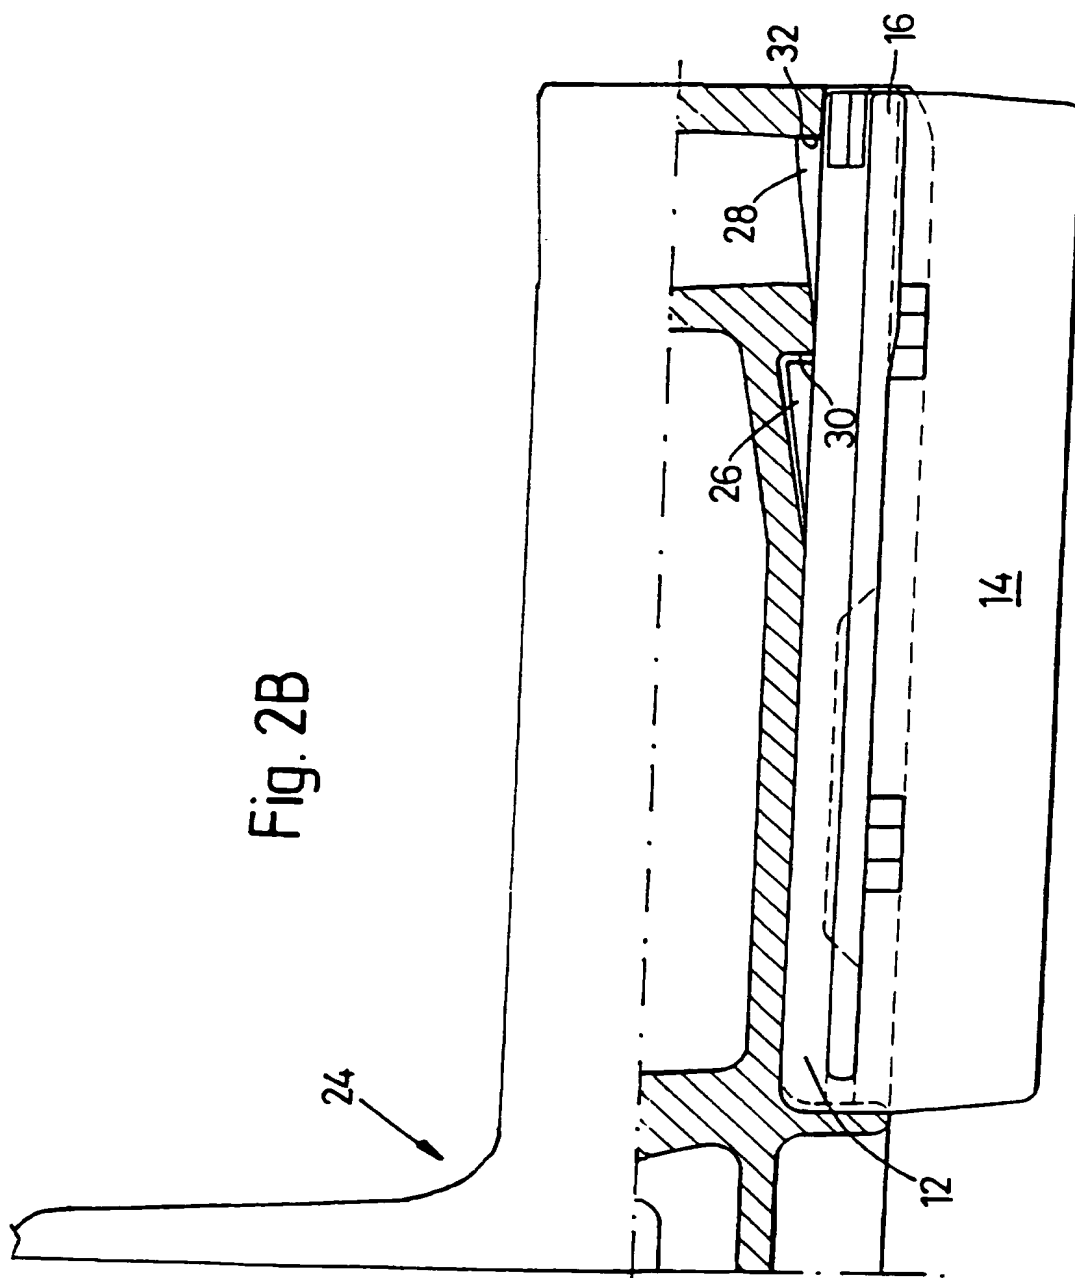

4 / 17

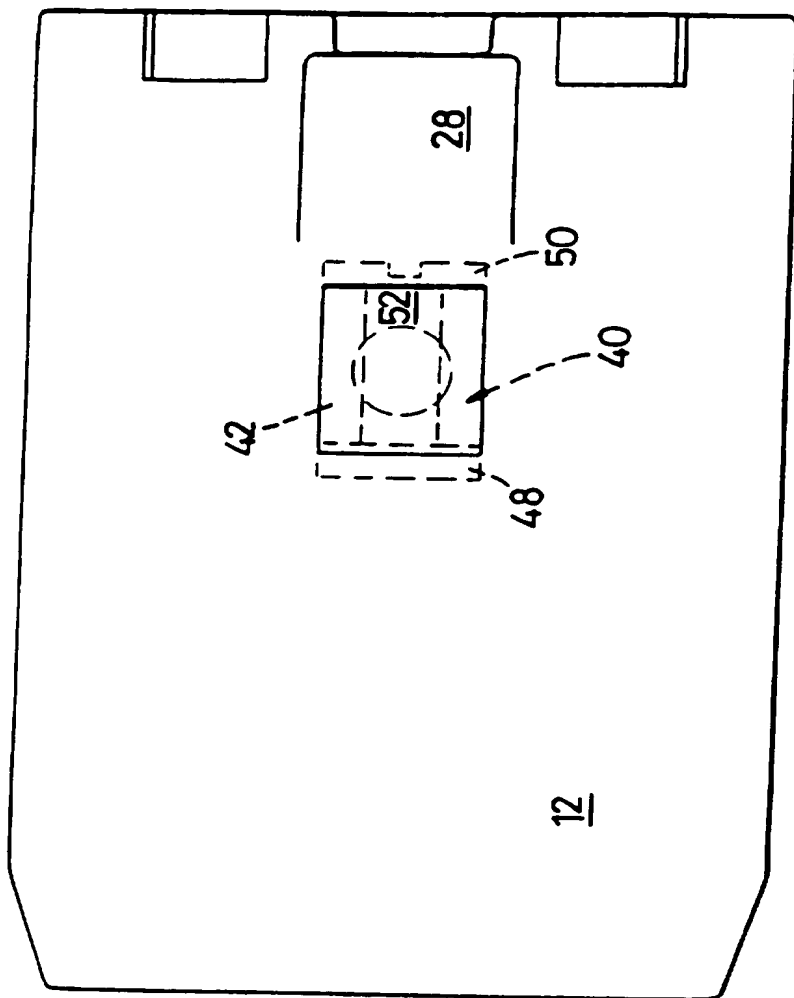


Fig. 3A

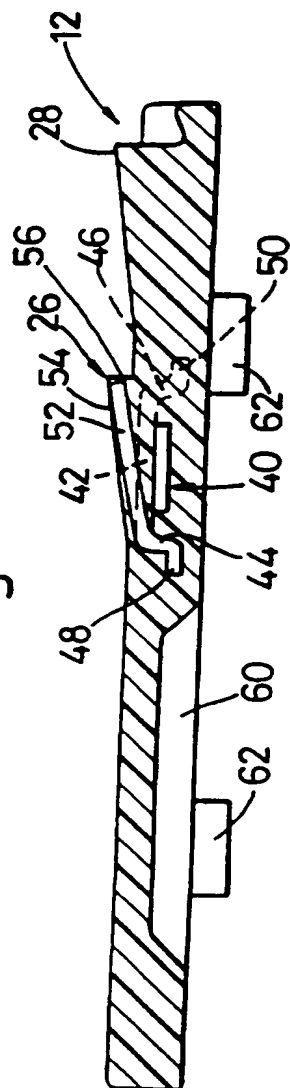


Fig. 3B

5/17

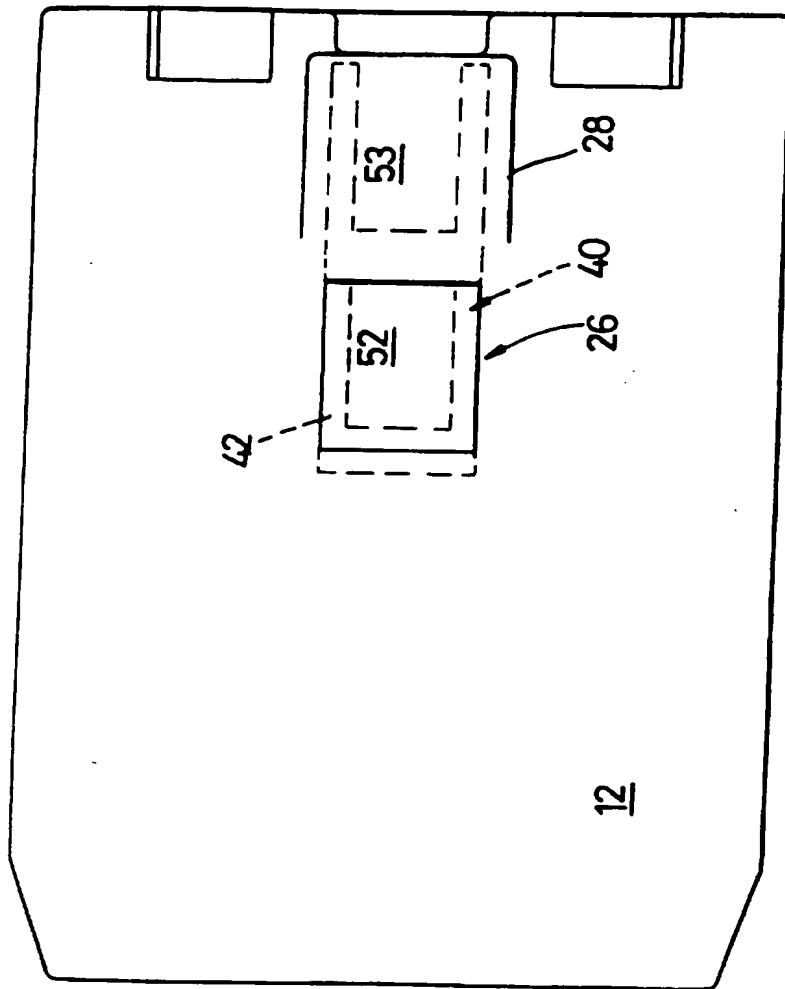


Fig. 4A

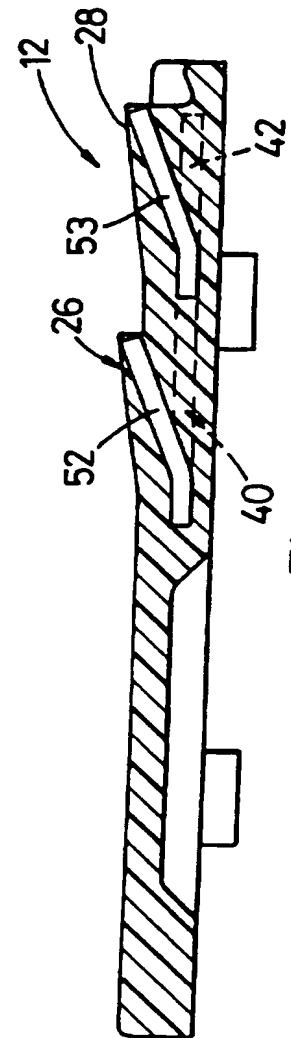


Fig. 4B

6/17

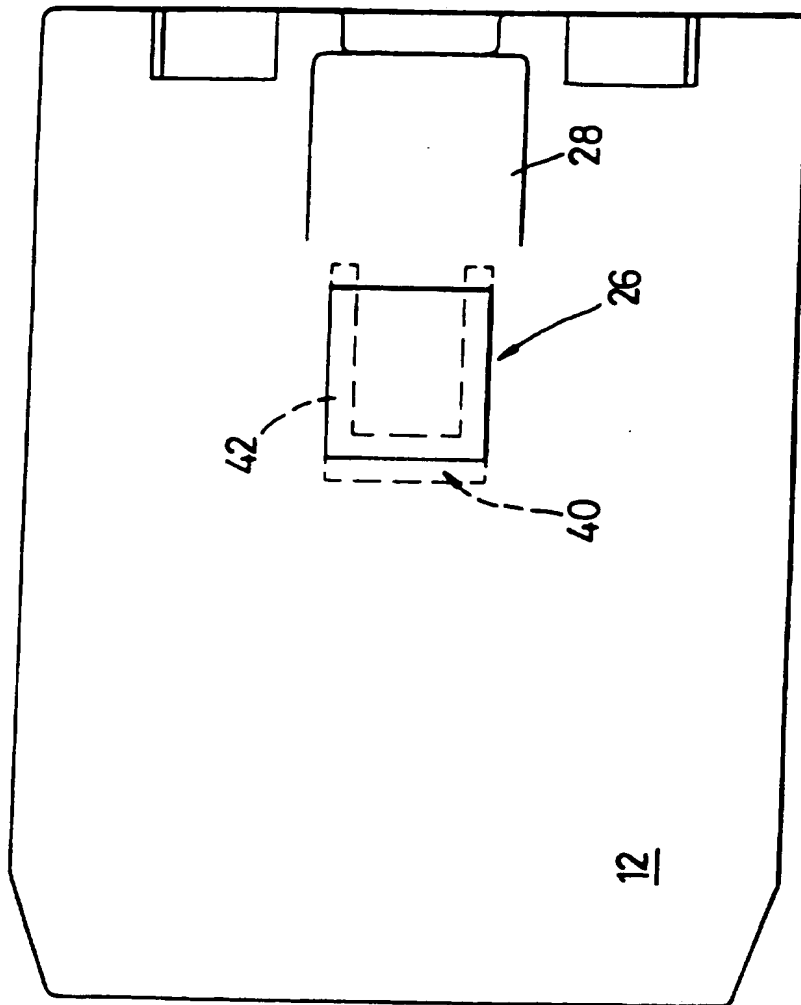


Fig. 5A

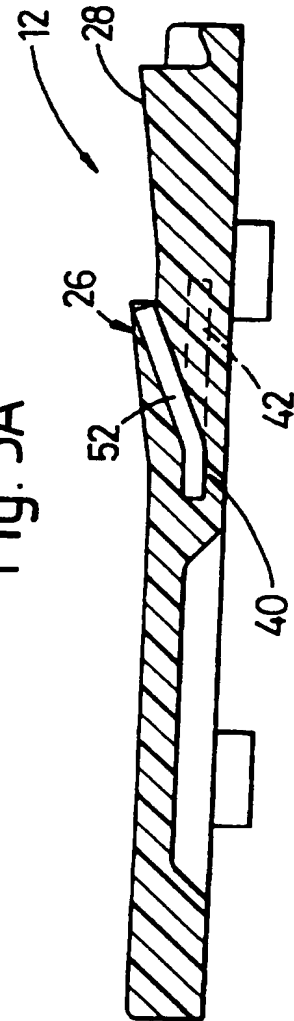


Fig. 5B



7/17

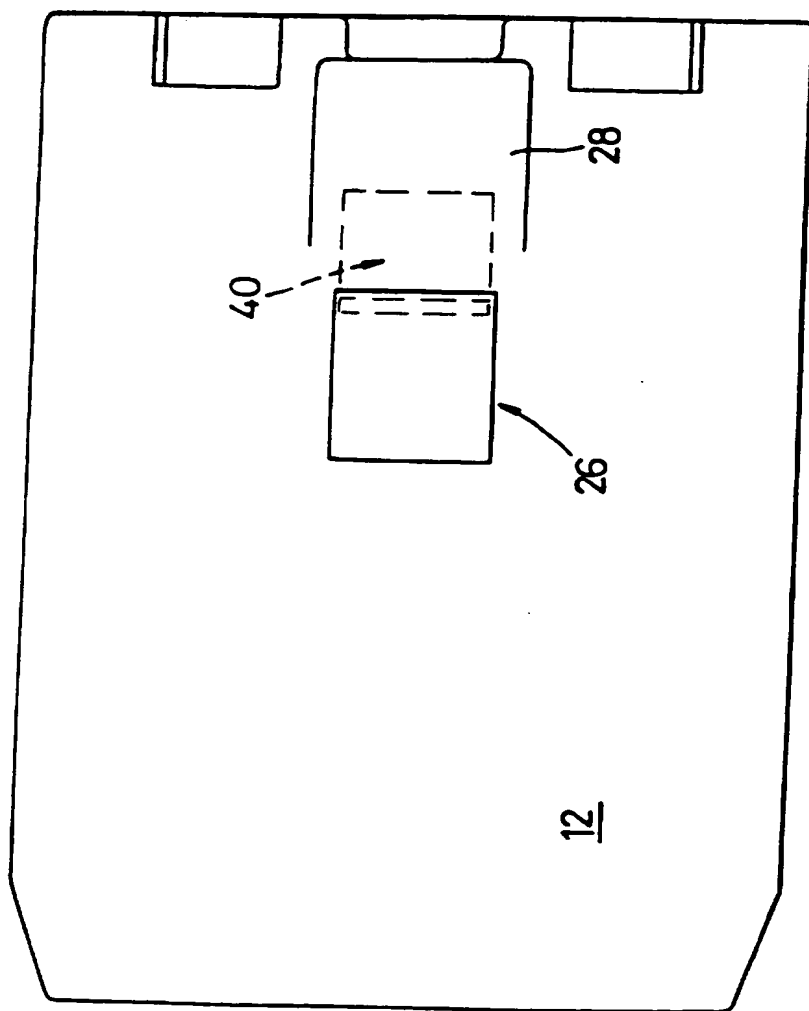


Fig. 6A

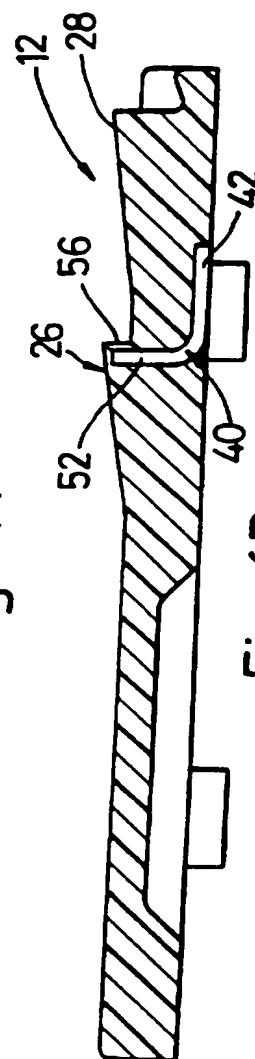


Fig. 6B

8/17

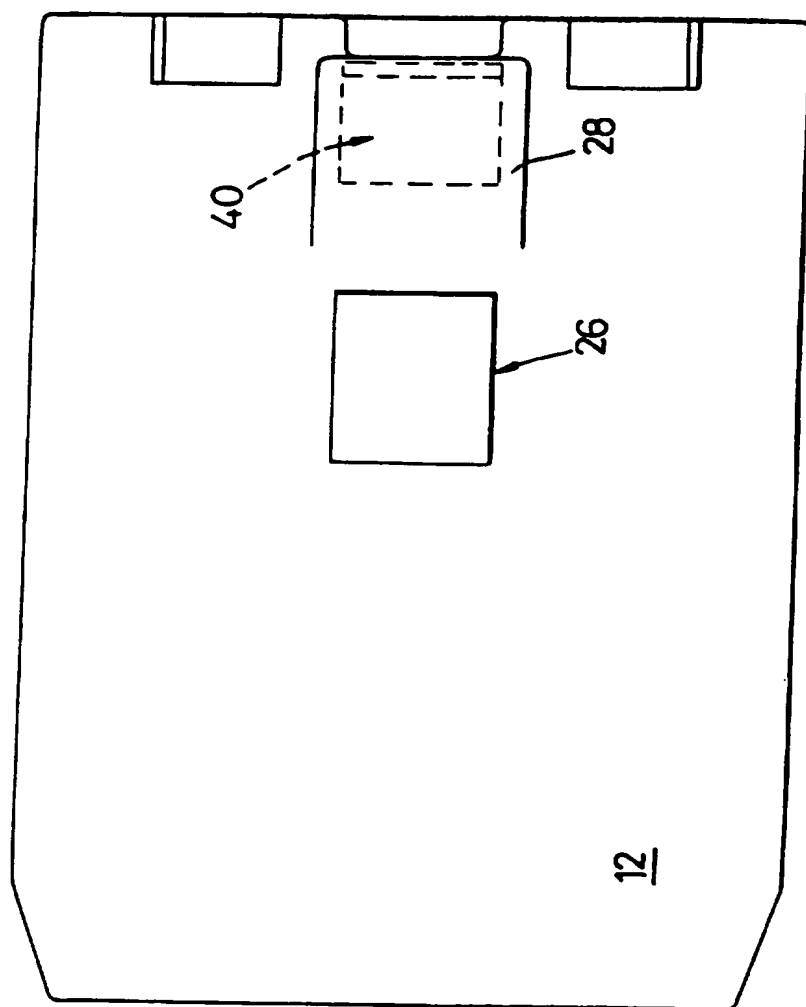


Fig. 7A

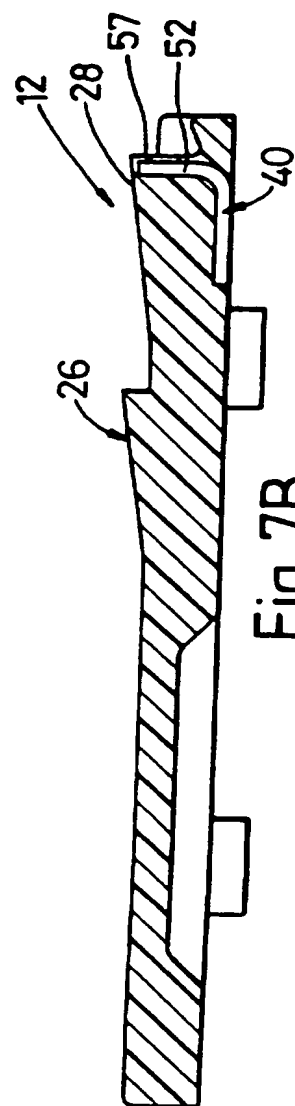


Fig. 7B

9 / 17

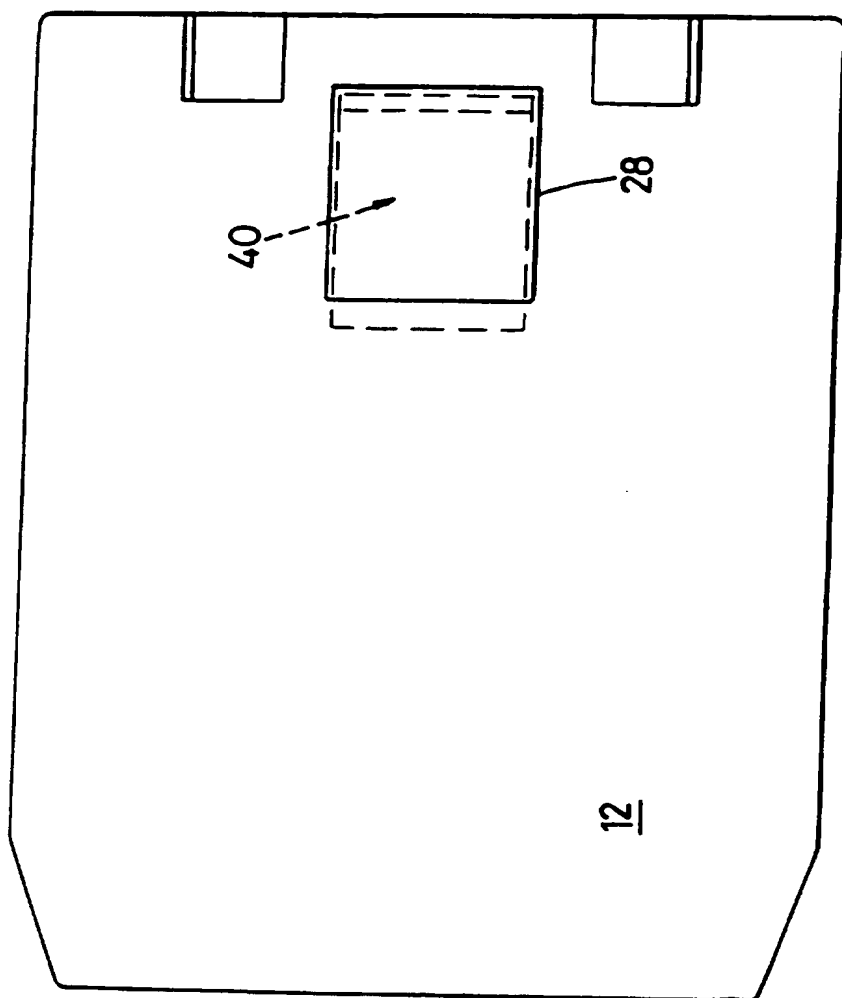


Fig. 8A

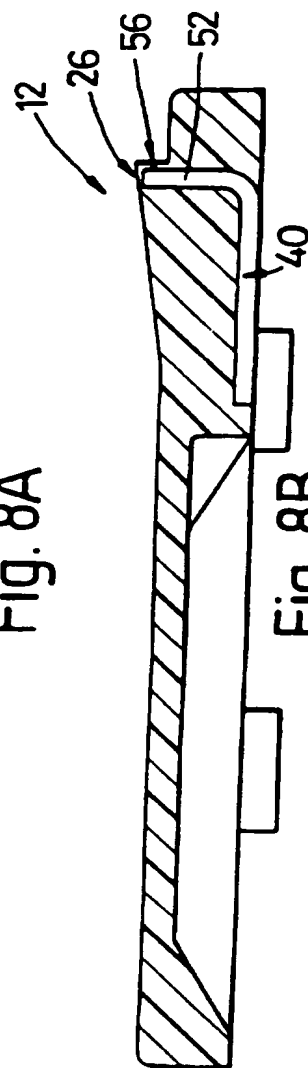


Fig. 8B

10/17

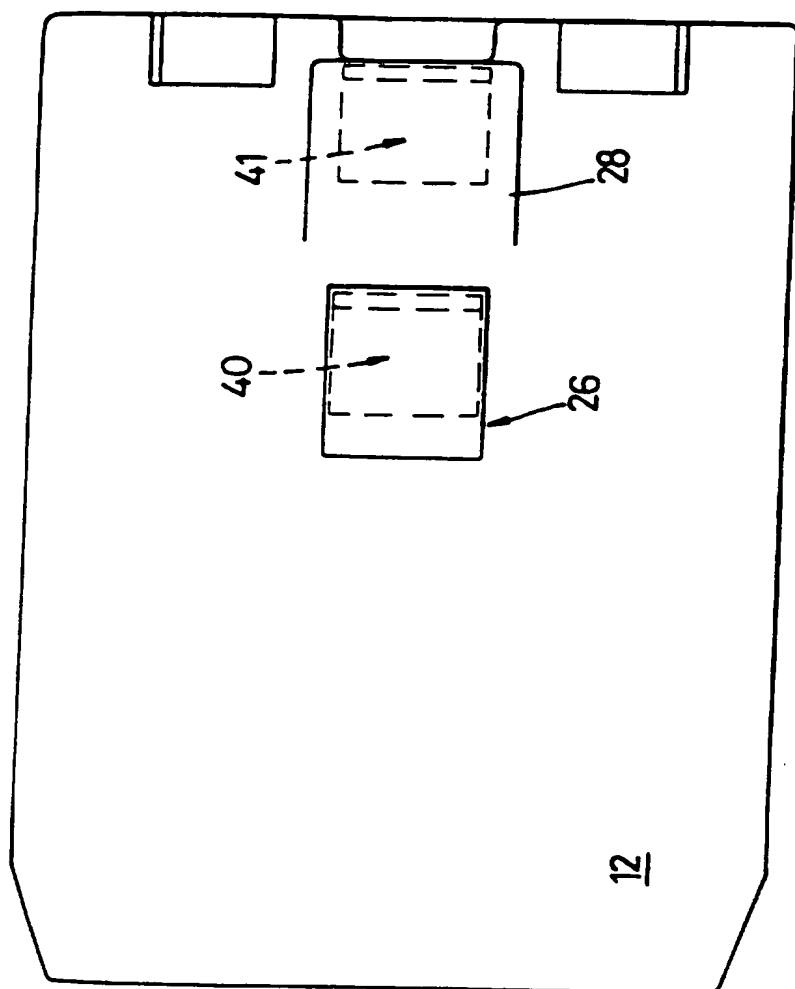


Fig. 9A

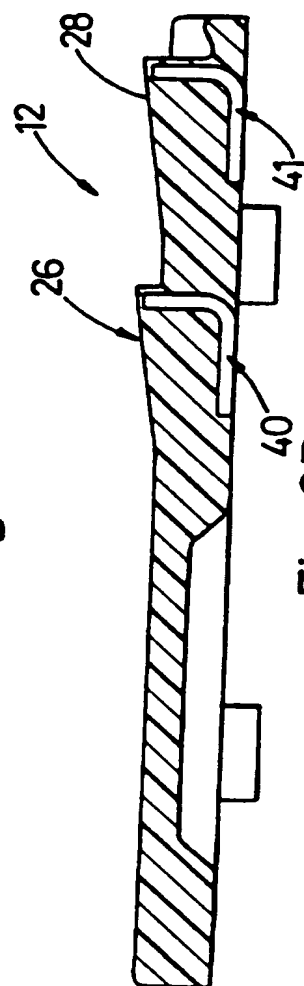


Fig. 9B

11/17

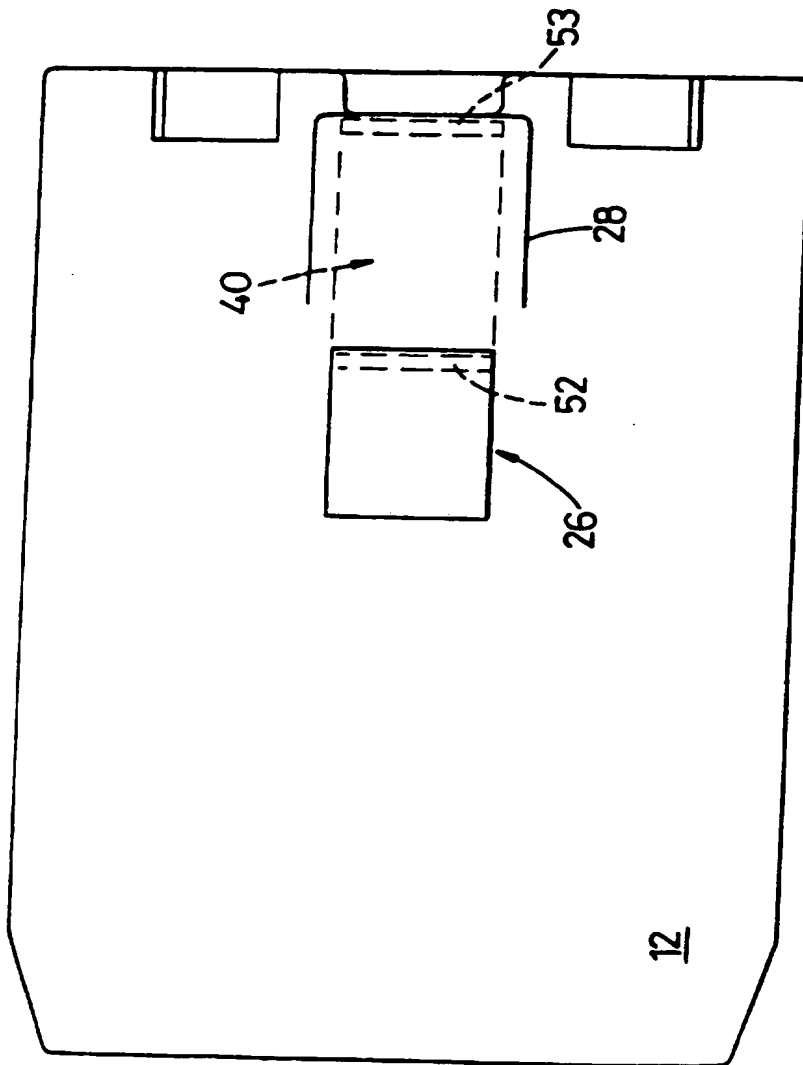


Fig. 10A

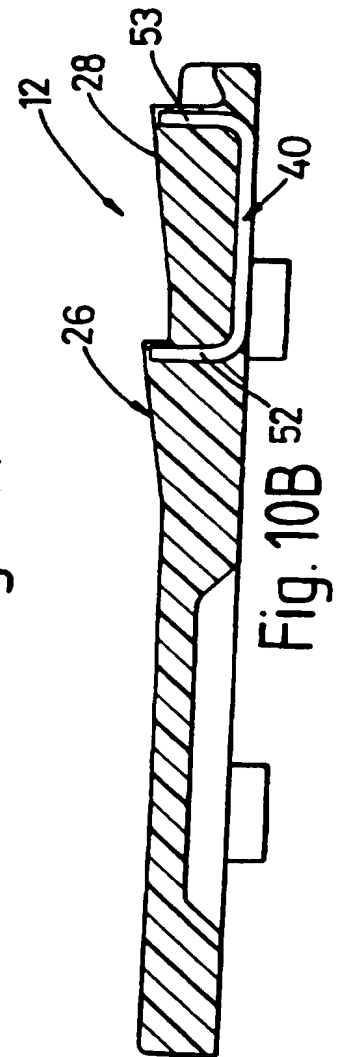


Fig. 10B

12/17

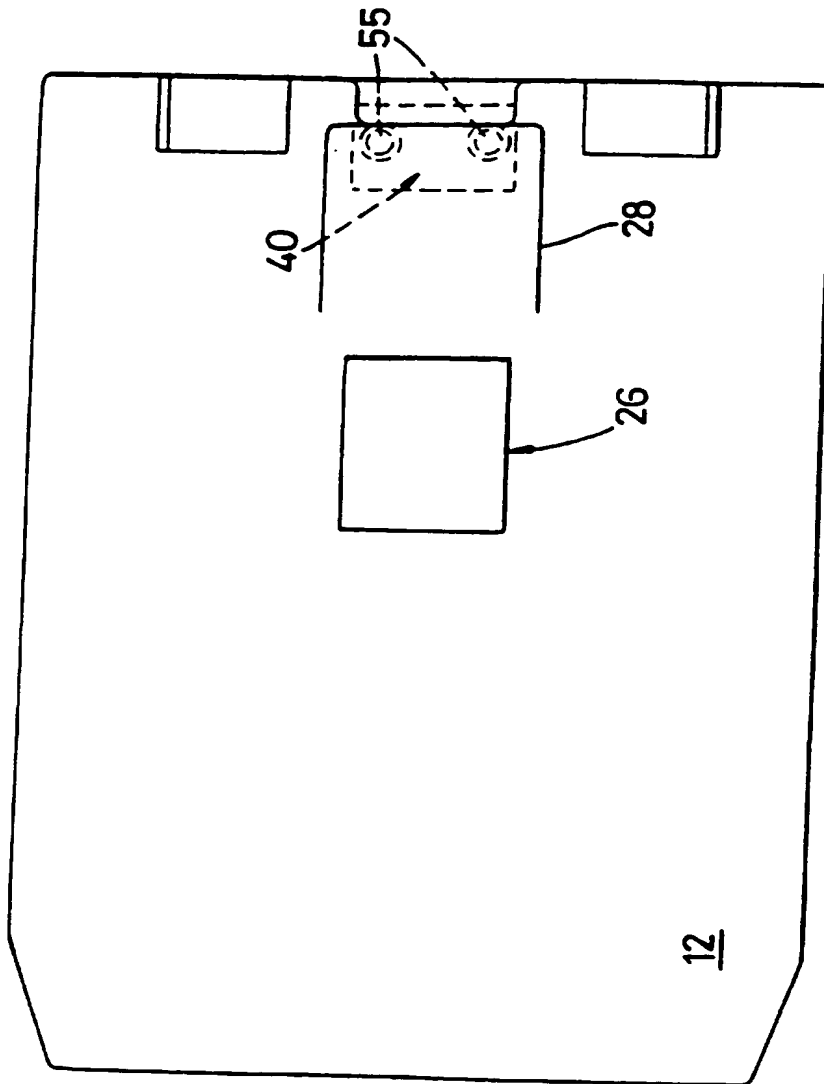


Fig. 11A

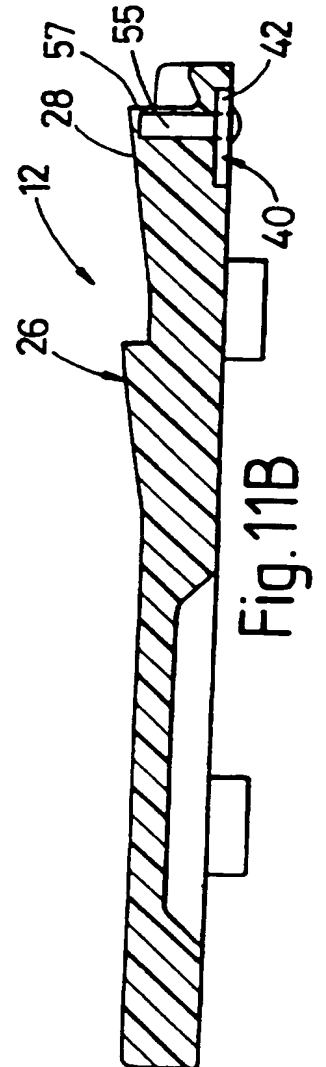


Fig. 11B

13/17

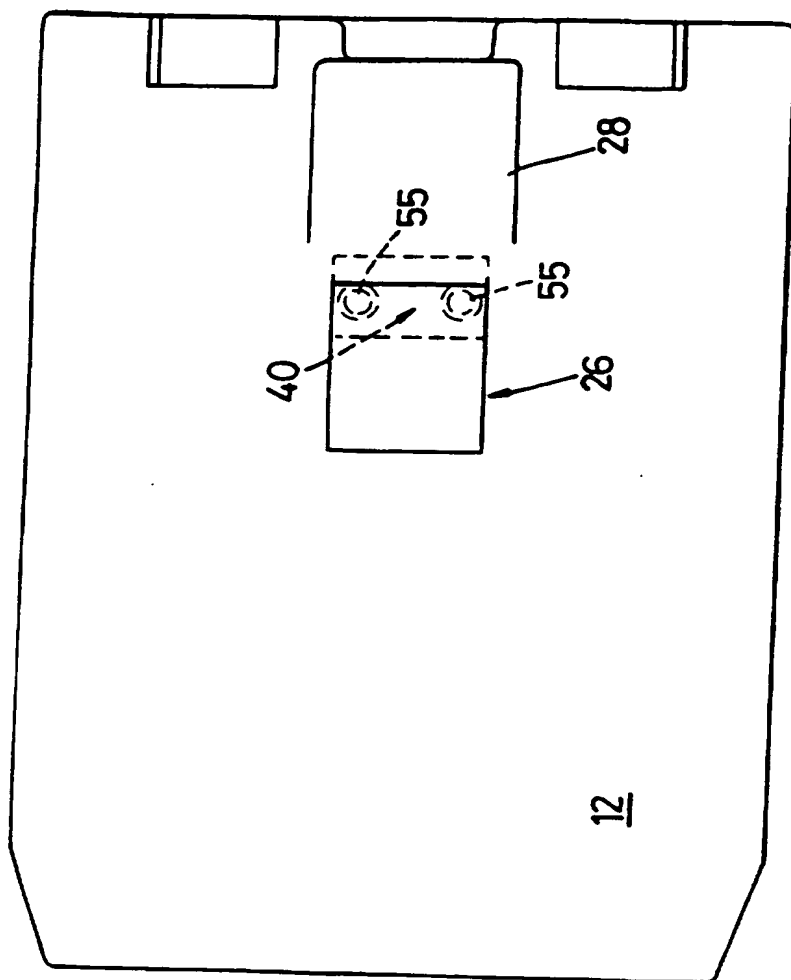


Fig. 12A

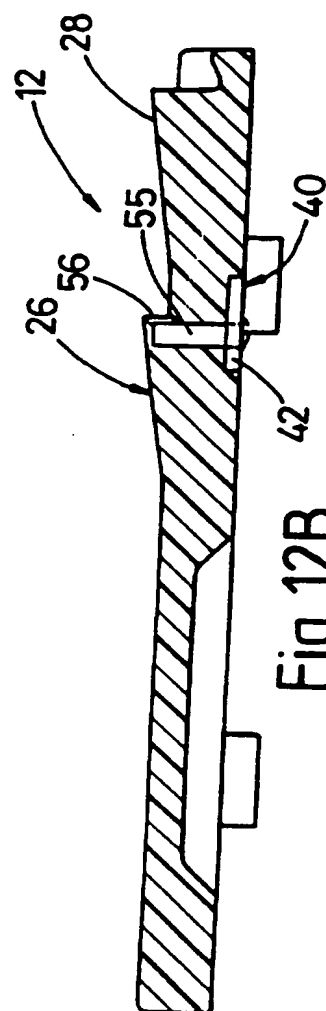


Fig. 12B

14/17

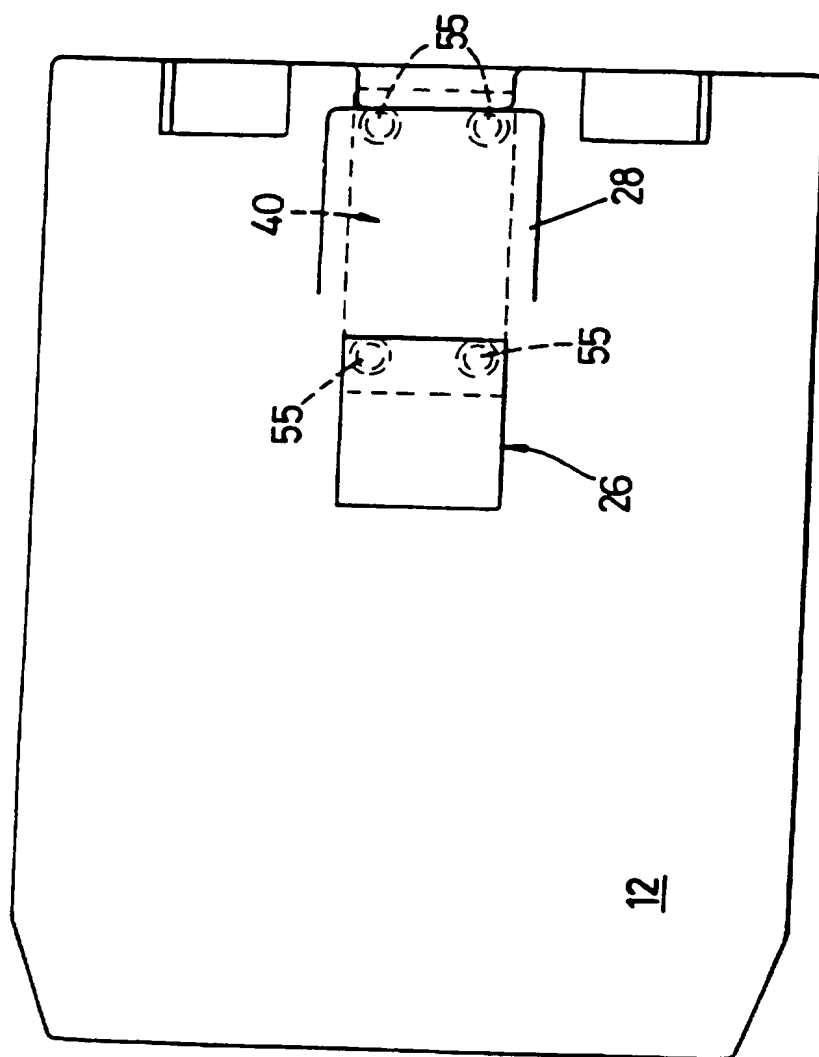


Fig. 13A

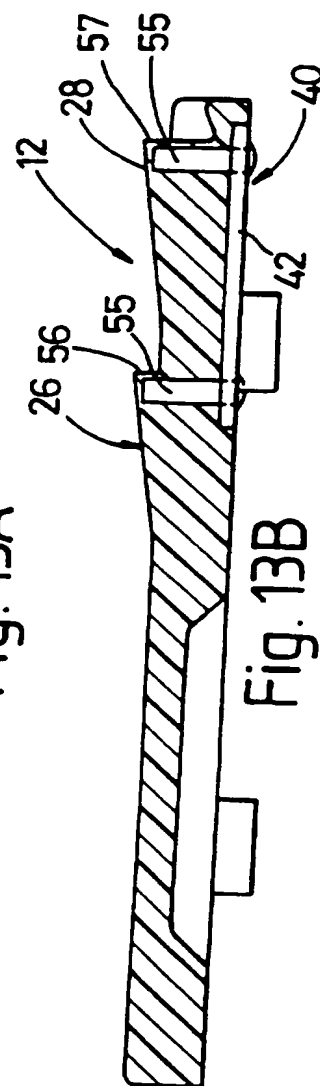


Fig. 13B



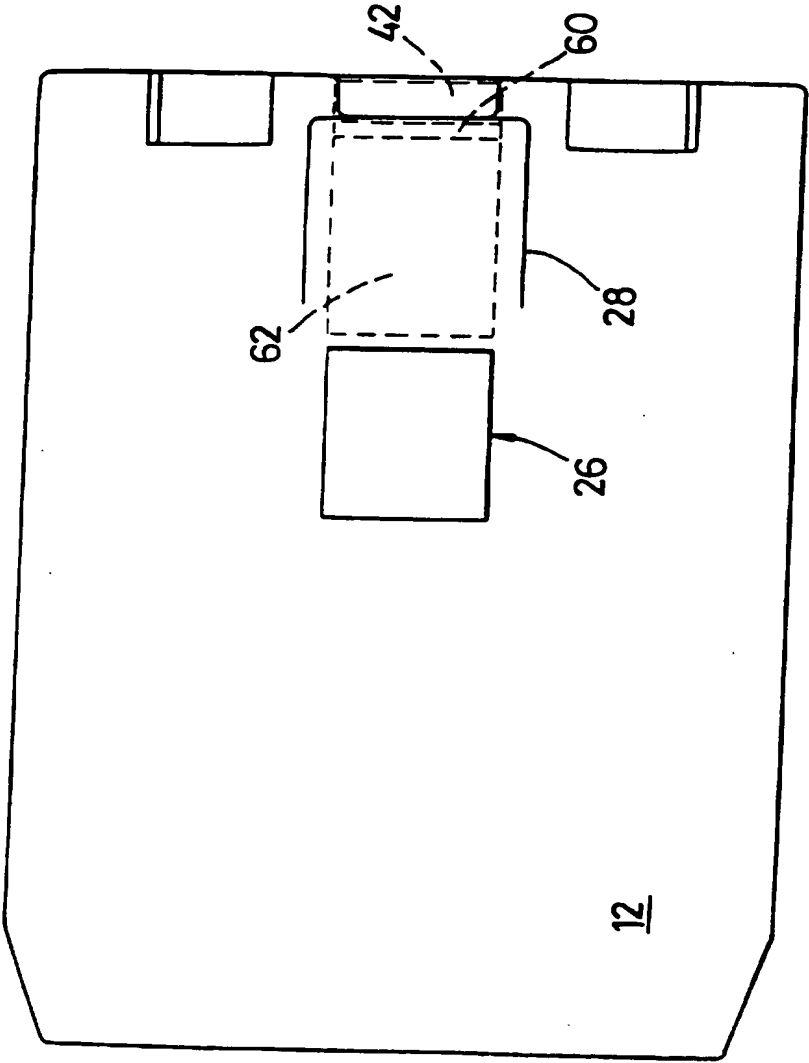


Fig. 14A

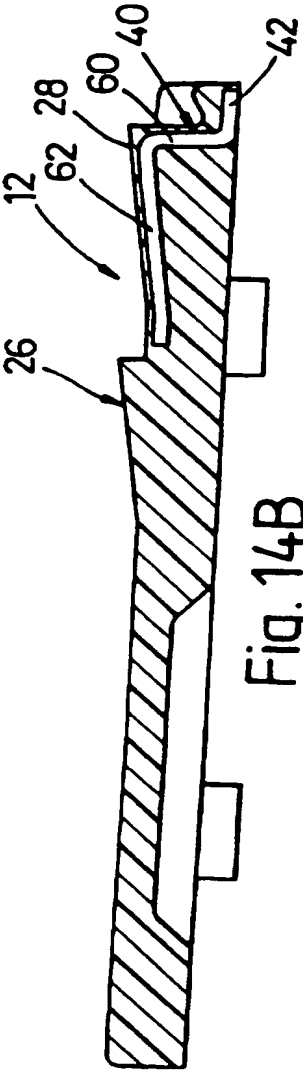


Fig. 14B

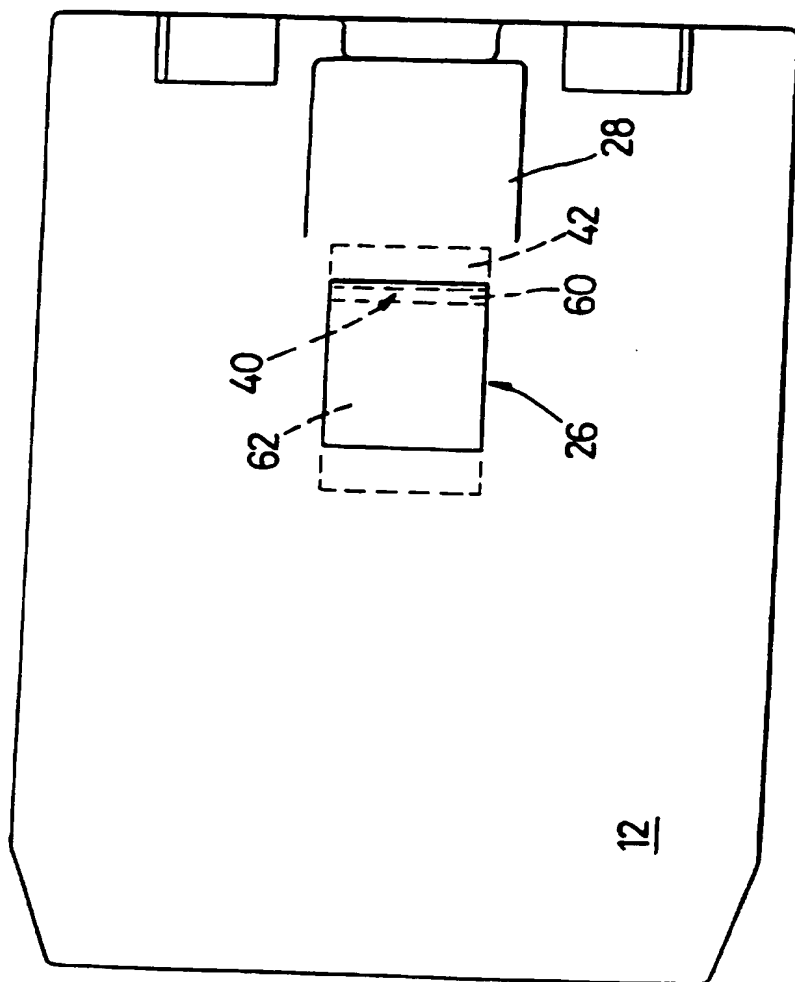


Fig. 15A

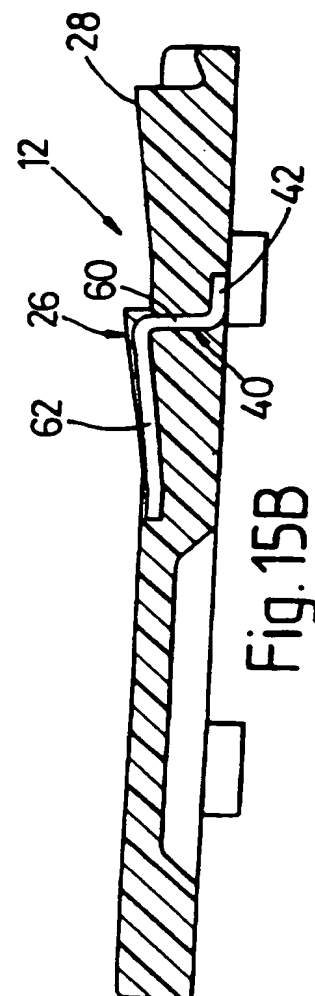


Fig. 15B

17/17

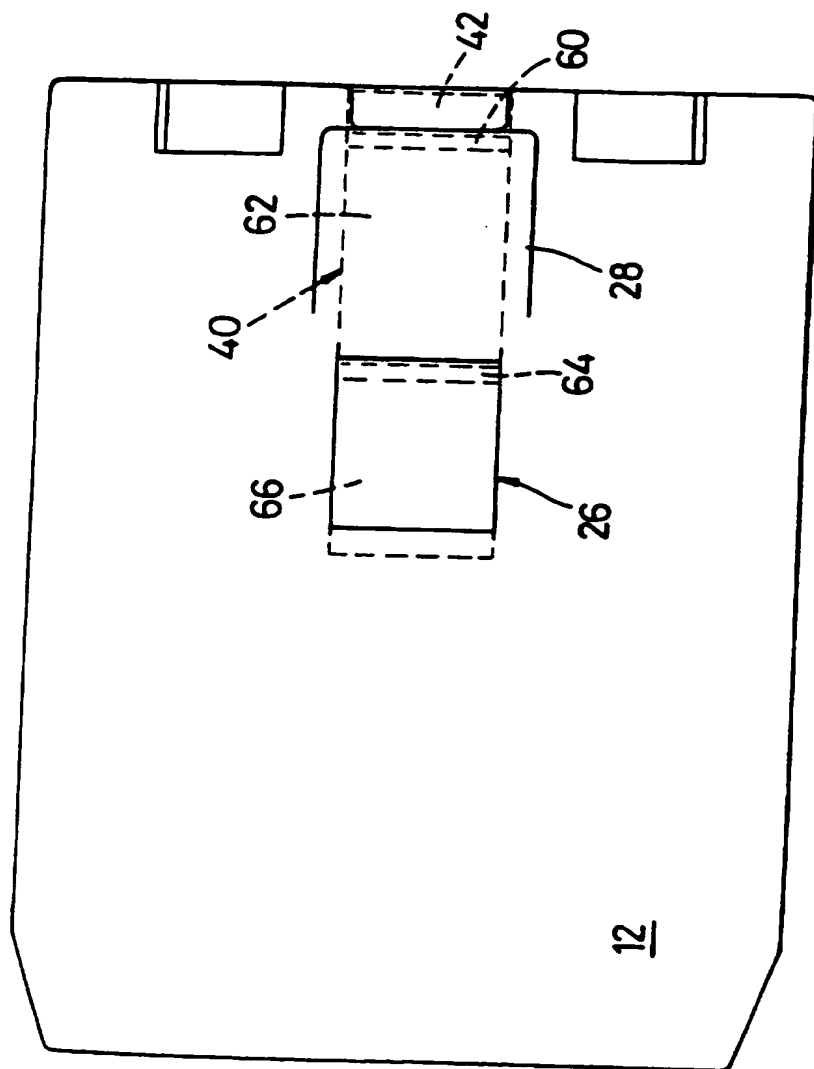


Fig. 16A

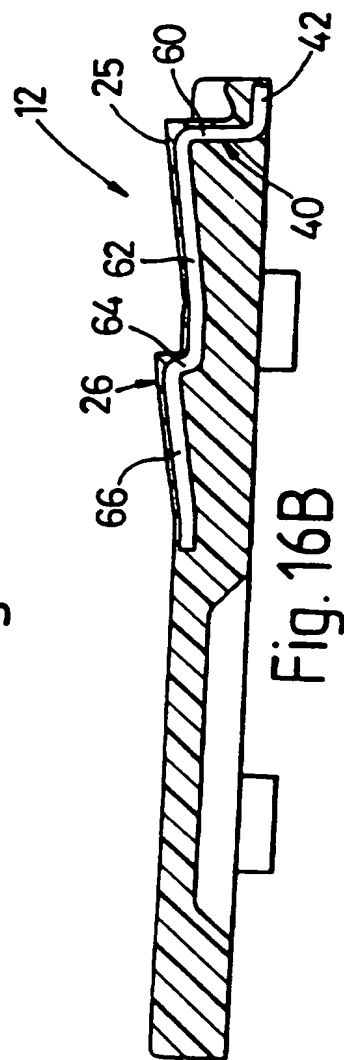


Fig. 16B

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/00625

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B62D55/275

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,3 973 807 (KORNER OTTO ET AL) 10 August 1976 see column 2, line 3 - line 56; figures 1-3	1
A	DE,A,39 09 043 (MAK MASCHINENBAU KRUPP) 20 September 1990 see column 2, line 54 - page 3, line 1; figures 5,6	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

27 June 1996

Date of mailing of the international search report

02.07.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Chlosta, P

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/GB 96/00625

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3973807	10-08-76	DE-B- 2336742 DE-U- 7326485 AU-B- 7116474 CA-A- 1014756	17-10-74 16-01-75 15-01-76 02-08-77
DE-A-3909043	20-09-90	NONE	